

TECHNICAL DATA SHEET

SYNTHETIC WOVEN & NON-WOVEN CAPPED (GSC122)

"GEO SOURCE GSC122 is a Capped Geo-Textile made from 100% Synthetic Material, which are formed due to interlacement of Woven & Non-Woven together. GEO SOURCE GSC122 is an ISO 9001:2015 certified product meeting all requirements as per ASTM Standard.

GEO SOURCE GSC122 conforms to the Values listed below:

SYNTHETIC WOVEN & NON-WOVEN CAPPED (GSC122)			
PROPERTY	TEST METHOD	ENGLISH (MARV ²)	METRIC (MARV ²)
Mass Per Unit Area	ASTM D 5261	4.85 Oz/yd ² (Scrim 2.6 & Capping 2.2)	165 g/m ² (Scrim 90 & Capping 75)
Grab Tensile Strength (MD)	ASTM D 4632	105 lbs	468 N
Grab Elongation	ASTM D 4632	15%	50%
Grab Tensile Strength (CD)	ASTM D 4632	80 lbs	356 N
Grab Elongation	ASTM D 4632	15%	50%
Trapezoid Tear Strength (MD)	ASTM D 4533	35 lbs	156 N
Trapezoid Tear Strength (CD)	ASTM D 4533	30 lbs	133 N
CBR Puncture Resistance	ASTM D 6241	300 lbs	1335 N
Water Flow	ASTM D 4491	10 gpm/ft ²	407 l/m ² /min
UV Resistance	ASTM D 4355	70%/2500 hrs	70%/2500 hrs

PACKAGING		
Roll Dimension (W*L)	12*250 ft	3.66*76mtr
Area Per Roll	333 sqyds	278 sqmtr
Estimated Roll Weight	101 lbs	46 kg
Core	4"	
Packaging	Wrapped In Black Stretch Film	

We can do OEM packaging and private labeling for bulk orders


TECHNICAL DATA SHEET

SYNTHETIC WOVEN & NON-WOVEN CAPPED (GSC122)

"GEO SOURCE GSC122 is a Capped Geo-Textile made from 100% Synthetic Material, which are formed due to interlacement of Woven & Non-Woven together. GEO SOURCE GSC122 is an ISO 9001:2015 certified product meeting all requirements as per ASTM Standard.

GEO SOURCE GSC122 conforms to the Values listed below:

- Above values are obtaining in our laboratory and are MARV Values.
- There may be variation in above values due to various factors when tested at other laboratory.
- The above values may also vary if the fabric is converted in to any value added product or used in combination with other products.
- The values may also change due to transportation damages & improper storage and handling at site.
- Client shall ensure that Storage is strictly done as per ASTM standard.
- The values are not intended as warranty / guarantee and Geo Source assumes no liability in connection with this information.
- NTPEP approved products available
- Rolls available in shorter width like 3', 4'5', 6' and 12'
- We can do tri, four as well as master packs

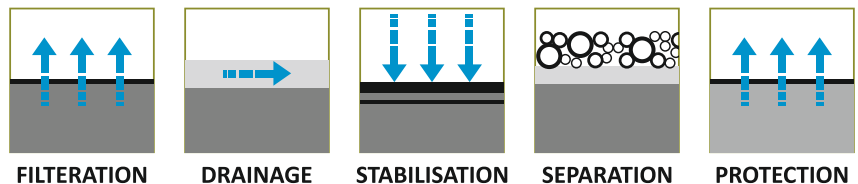

We can do OEM packaging and private labeling for bulk orders

- Above values are obtaining in our laboratory and are MARV Values (67.5 % Level of Confidence)
- Tolerance: Physical & Mechanical: - 10 % & Hydraulic: - 30%
- There may be variation in above values due to various factors when tested at other laboratory.
- The above values may also vary if the fabric is converted in to any value added product or used in combination with other products.
- The values may also change due to transportation damages & improper storage and handling at site.
- Client shall ensure that Storage is strictly done as per ASTM standard.
- The values are not intended as warranty / guarantee and Geo Source assumes no liability in connection with this information.

